


AURORA® FIRE PUMPS

COMPACT FIRE SYSTEM DIMENSIONS

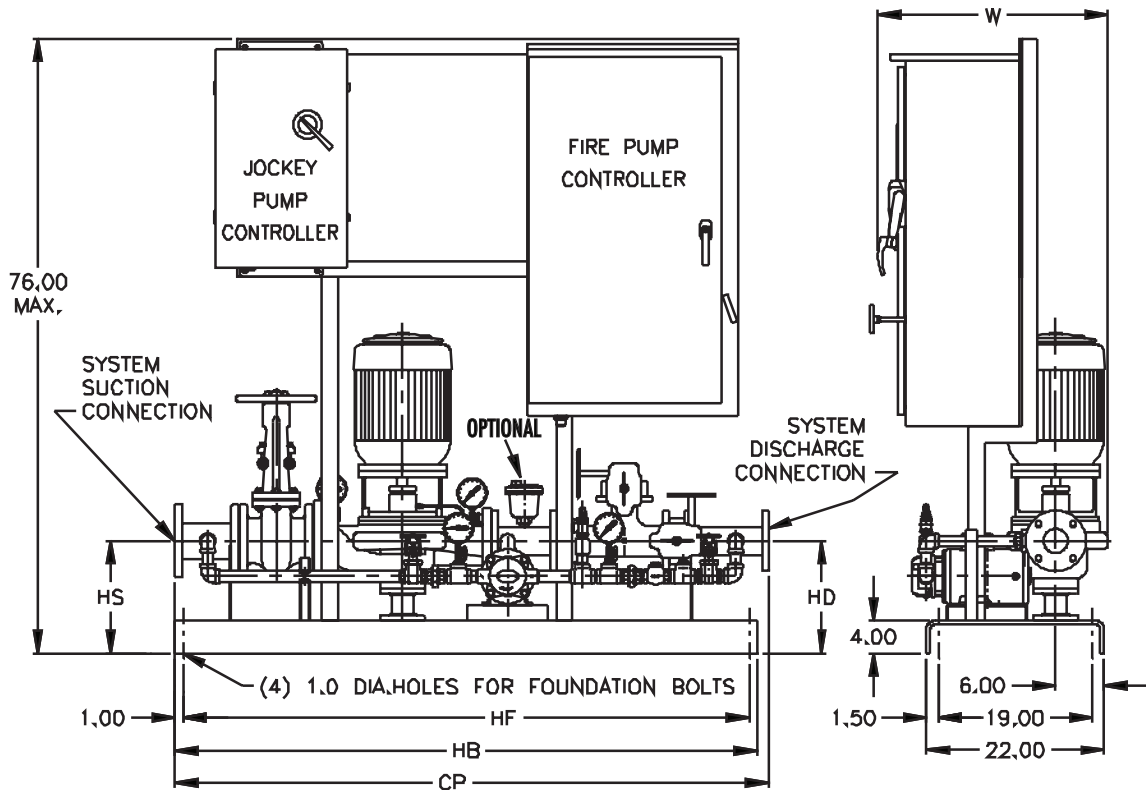

GPM	PSI	MODEL	HP	HB	HF	HD	HS	W	CP
50	75 - 155	2-383-9C	10 - 25	66 (1676)	64 (1626)	13.25 (337)	13.25 (337)	28.25 (718)	65.75 (1670)
100	43 - 70	3-383-7A	7.5 - 15	64 (1626)	62 (1575)	14.25 (362)	14.25 (362)	28.25 (718)	67.25 (1708)
	70 - 150	2-383-9C	10 - 25	66 (1676)	64 (1626)	13.25 (337)	13.25 (337)	28.25 (718)	65.75 (1670)
150	41 - 60	3-383-7A	7.5 - 10	64 (1626)	62 (1575)	14.25 (362)	14.25 (362)	28.25 (718)	67.25 (1708)
	60 - 160	3-383-9A	15 - 50	72 (1829)	70 (1778)	14.25 (362)	14.25 (362)	28.75 (730)	70.25 (1784)
200	40 - 55	3-383-7A	7.5 - 15	64 (1626)	62 (1575)	14.25 (362)	14.25 (362)	28.25 (718)	67.25 (1708)
	56 - 159	3-383-9A	15 - 50	72 (1829)	70 (1778)	14.25 (362)	14.25 (362)	28.75 (730)	70.25 (1784)
250	40 - 65	3-383-7B	15 - 20	72 (1829)	70 (1778)	14.25 (362)	13.75 (349)	28.25 (718)	75.50 (1918)
	70 - 138	3-383-9	20 - 50	72 (1829)	70 (1778)	13.88 (353)	13.88 (353)	28.75 (730)	71.25 (1810)
300	42 - 73	4-383-7B	15 - 30	72 (1829)	70 (1778)	15.25 (387)	15.25 (387)	29.25 (743)	73.50 (1867)
	74 - 90	4-383-9B	25 - 30	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	74.50 (1892)
	91 - 139	4-383-9	30 - 60	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	74.50 (1892)
400	51 - 71	4-383-7B	20 - 30	72 (1829)	70 (1778)	15.25 (387)	15.25 (387)	29.25 (743)	73.50 (1867)
	70 - 85	4-383-9B	25 - 30	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	74.50 (1892)
	85 - 136	4-383-9	30 - 60	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	74.50 (1892)
450	49 - 72	4-383-7B	20 - 30	84 (2134)	82 (2083)	15.25 (387)	14.75 (375)	29.25 (743)	89.25 (2267)
	82 - 135	4-383-9	30 - 60	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	81.00 (2057)
	96 - 131	4-383-9B	40 - 60	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	81.00 (2057)
500	55 - 71	4-383-7B	25 - 30	84 (2134)	82 (2083)	15.25 (387)	14.75 (375)	29.25 (743)	89.25 (2267)
	72 - 92	4-383-9C	30 - 50	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.50 (749)	81.00 (2057)
	94 - 130	4-383-9B	40 - 60	72 (1829)	70 (1778)	15.00 (381)	15.00 (381)	29.25 (743)	81.00 (2057)
750	54 - 84	4-383-13	40 - 75	84 (2134)	82 (2083)	17.81 (452)	17.81 (452)	32.50 (826)	93.50 (2375)
	86 - 143	4-383-10B	60 - 100	84 (2134)	82 (2083)	17.06 (433)	17.06 (433)	30.50 (775)	89.50 (2273)

NOTES:

1. All dimensions are in inches(mm) and may vary $\pm 3/8"$.
2. Not for construction purposes unless certified.
3. System suction and discharge flanges are ANSI class 125 flat face.
4. Refer to selection tables in section 911 for selection of pump sizes and motor horsepower for specific applications.
5. Standard controller is across-the-line. Refer to factory for the availability of optional controller starting methods.
6. Dimensions and specifications subject to change without notice. Please see other drawings.

THIS PAGE LEFT INTENTIONALLY BLANK