

DELTA ENVIRONMENTAL®


Lifting Rope

Specifications

100% tested 3-strand twisted, monofilament rope is twice as strong as manila rope. Resistant to rot, abrasion, mildew, petroleum products, marine growth, and many chemicals.

- Part Number #2301-925-2100
- 3/8" Solid Braided Polypropylene Rope (poly-pro)
- Yellow
- Breaking Strength – 1742 lbs.
- Safe Working Load – 244 lbs.

NOTE: All rope cut to appropriate length for system

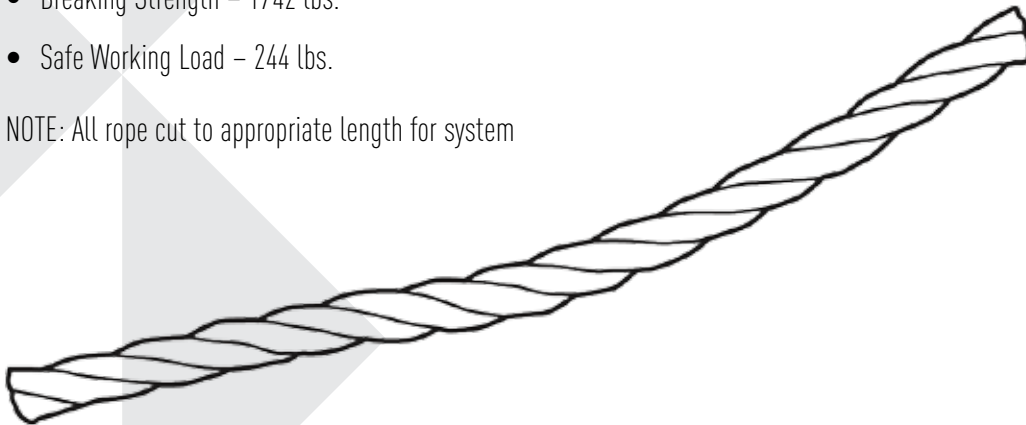

8263 FLORIDA BLVD., DENHAM SPRINGS, LA 70727, 225-665-6162, 1 (800) 219-9183 | WWW.DELTAENVIRONMENTAL.COM

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.
K4281 07/28/13 © 2013 Pentair Ltd. All Rights Reserved.