


# DELTA ENVIRONMENTAL<sup>®</sup>

## Direct Burial Cable

### Specifications

- Part Number #14409-001-1
- Direct Burial and Sunlight Resistant
- Conductor/Pair Count: 5 Conductors
- Gauge and Stranding: 12 AWG 19/25 BC
- D.C. Resistance: 1.56 /MFT
- Primary Insulation Type: PVC and Nylon
- Insulation Thickness: .016" and .005"
- Color Code: Black, Red, Blue
- Air Line Tube: Parker Parflex Tube .250"
- Tape: Clear Mylar
- Drain Wire: N/A
- Cap. Cond. to Cond.: 34 pF/ft.
- Cap. Cond. to Shield: N/A
- Footage Markers: Ascending and Descending
- Jacket Thickness: .060"
- Jacket Color: Black
- Jacket Material: PVC
- Rip Cord: Yes
- Nominal O.D.: .552"
- Voltage Rating: 600V
- Temp. Rating: 90°C Dry, 75°C Wet
- UL Type or Style: THHN/THWN or TC
- Packaging: TBA
- Copper Weight: 62.88 lbs/mft
- Shipping Weight: 147 lbs/mft

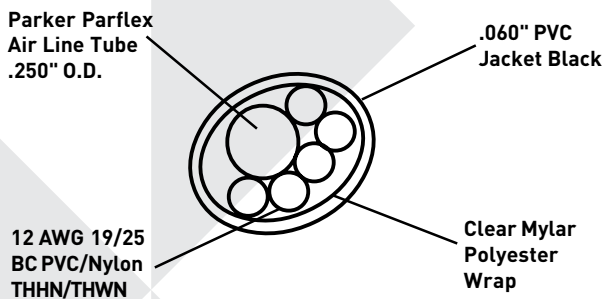

8263 FLORIDA BLVD., DENHAM SPRINGS, LA 70727, 225-665-6162, 1 (800) 219-9183 | [WWW.DELTAENVIRONMENTAL.COM](http://WWW.DELTAENVIRONMENTAL.COM)

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.  
K4282 07/28/13 © 2013 Pentair Ltd. All Rights Reserved.